



### Tradition 150

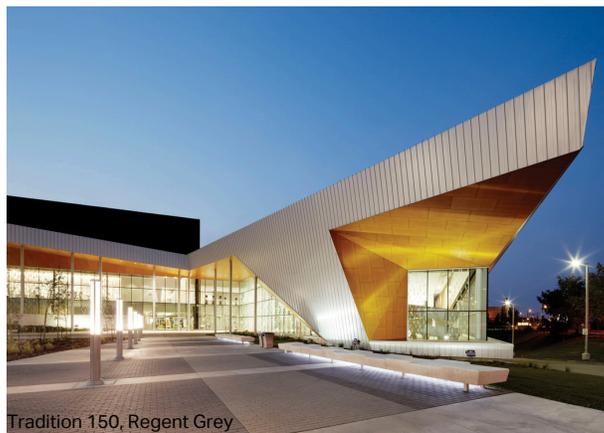

### Tradition 150

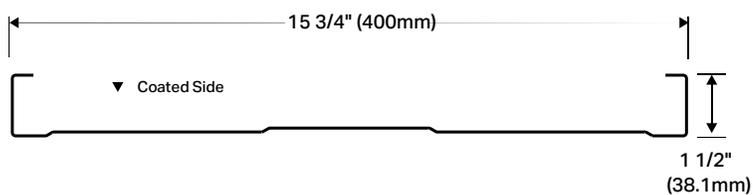

#### Product Description

The Tradition 150 profile with the T-style mechanically seamed ribs are expertly designed for low-slope applications as shallow as 2 in 12. Tradition 150 panels include thermally responsive clips that accommodate thermal expansion and contraction.

#### Dimensions

Fastening System	Hidden fasteners
Application	Roof
Covered Width	16" (400mm)
Profile Depth	1.5" (38.1mm)
Minimum Slope	2:12

#### Available Gauges

	Weight LB/FT2*
Non-Standard 22GA	1.66
Standard 24GA	1.31

\*Weight-LB per square foot may differ per paint finish. Please contact your sales representative for further assistance.

#### Production Lengths

Stratford, ON	4' - 40' max (1.22 - 12.19m)
---------------	------------------------------

#### Lead Time

Standard Regional	3-4 weeks
Custom Order	Upon customer request

#### Principal Characteristics

- Tradition 150 is ideal for sloped roofs as low as 2 in 12
- KR-Clip system in Tradition 150 allows for thermal expansion
- Tradition 150 requires a field seamer

### Tradition 150

#### Signature – SMP Coated Metal

Deep Grey 55174 24GA	Charcoal 56072 24GA	Regent Grey 56082 24GA	Stone Grey 56071 24GA

#### Testing Data



Fire Resistance		
Test Type	Test Standard	Result
FIRE: Non-Combustibility	ULC S135	Pass
FIRE: External Fire Exposure	ULC S107	Pass
FIRE: External Fire Exposure	UL 790	Pass

#### Trims

Trims for this profile must be custom-engineered on a per-project basis. Please contact your sales representative.

#### Fastening System Profile

Tradition 150

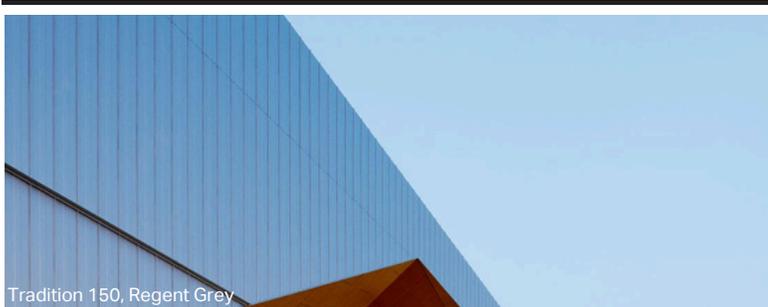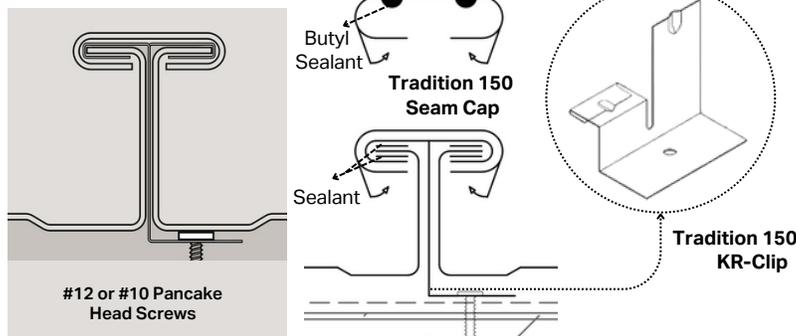

#### Colour Availability



Please scan the QR code or [click here](#) to confirm colour availability by region.

#### Warranty

[Weather XL](#)



#### Engineering & Environmental Documents

[CSSBI EPD](#)

[XCarb EPD](#)

#### Approved Substrates / Design Information

This product must be used exclusively on structural substrate with a minimum thickness of 0.5 inches or a sub-girt system complete with rigid insulation. **This product is custom-engineered on a per-project basis. Please contact your sales representative for more information.**



Vicwest Inc. reserves the right to amend product specifications without prior notice. Product specification, thicknesses and colours shown in this document should not be taken as being available in all regions, and reference should be made to Vicwest's colour chart, or advice should be sought from Vicwest's Customer Service Department. Recommendations for the uses described herein should be verified for suitability and compliance with actual requirements of any local building codes, applicable laws and regulations.

Colours shown in this document are representative only. Final colour selection should be made from actual colour samples which are available through our Sample Store. To ensure you are viewing the most recent and accurate product information, please scan the QR code or [click here](#).

vicwest-tradition-150-data-sheet-en-ca  
MKG-DS-EN-V1

VWTR1503ENS