CL6025(R)/CL725(R)

Data Sheet

Exposed Fastener | Roof & Wall

CL6025 35.43" | CL6025R 35.43" | CL725 35.43" | CL725R 35.43"

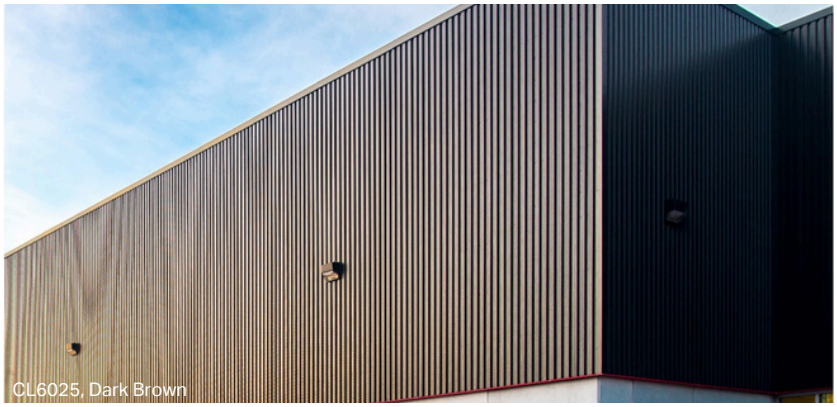

CL6025

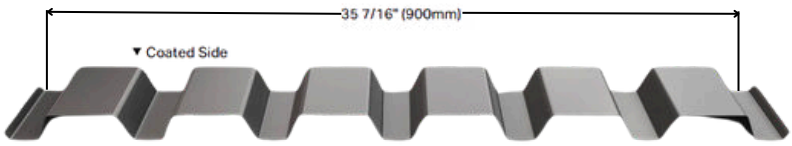

CL6025(R)

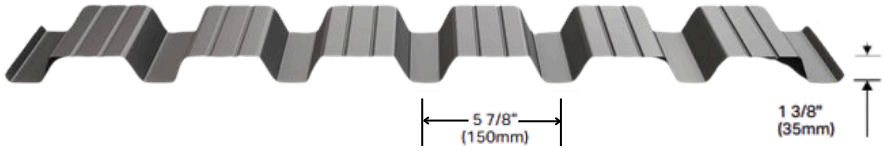

CL725

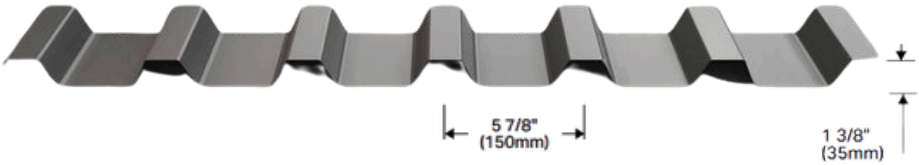

CL725(R)

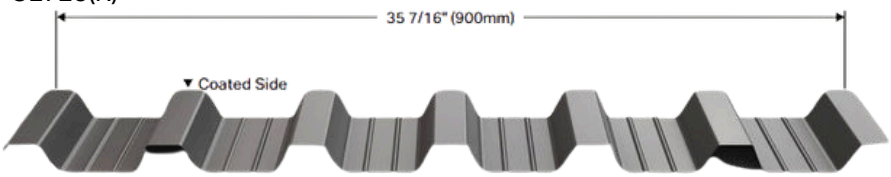

Market

- Commercial
- Architectural

Dimensions

Fastening System	**Exposed Fastener**
Application	**CL6025(R) - Wall** **CL725(R) - Roof & Wall**
Covered Width	**35.43" (900mm)**
Profile Depth	**1.38" (35mm)**

Available Gauges		**Weight LB/FT2***
Gauge **18GA**	Non-Standard	**2.71**
20GA	Non-Standard	**2.00**
22GA		**1.68**
24GA		**1.35**
26GA		**1.02**

*Weight-LB per square foot may differ per paint finish and profile covered width. Please contact your sales representative for further assistance.

Production Lengths

Stratford, ON	**3' – 40' max (0.9– 12.19m)**
Victoriaville, QC	**1' – 44' max (0.3 – 13.41m)**

Fastening System

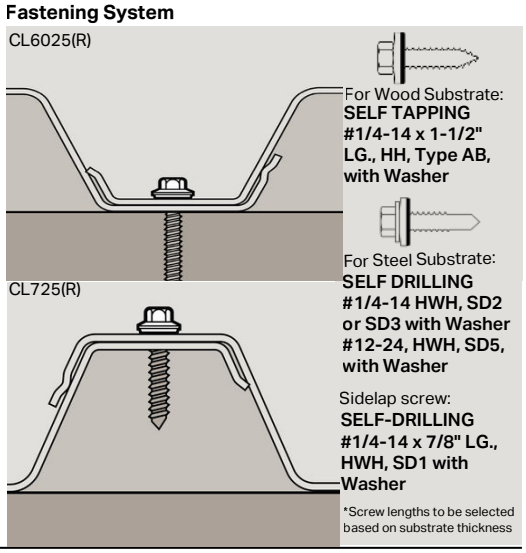

Product Description

CL6025(R) profiles, featuring CL725(R) on the reverse side, offer an appealing and versatile solution for both walls and roofs with their 1-3/8" ribs. CL725(R) includes side laps at the high flute, and when combined with taped or sealed side laps, creates a secure lap design aimed at minimizing opportunities for water ingress. Both profiles can be curved to seamlessly accommodate curved facades and barrel-type roofs. Panels are available with minor ribs for a distinctive look and improved panel stiffness.

CL6025(R)/CL725(R) vicwest

Data Sheet

Exposed Fastener | Roof & Wall

CL6025 35.43" | CL6025R 35.43" | CL725 35.43" | CL725R 35.43"

Signature – SMP Coated metal

Black 56068 24, 26GA	Deep Grey 55174 24, 26GA	Charcoal 56072 22, 24, 26GA	Regent Grey 56082 22, 24, 26GA	Stone Grey 56071 22, 24, 26GA	Bone White 56069 22, 24, 26	White White 56076 22, 24, 26GA	Cambridge White 56161 24, 26GA
Bright White 56086 24GA	Dark Brown 56062 24, 26GA	Metro Brown 56154 26GA	Tan 56074 22, 24, 26GA	Tile Red 56066 26GA	Bright Red 56080 26GA	Antique Linen 56162 26GA	Dark Green 56073 26GA
Green 56078 24GA	Pacific Turquoise 56156 24GA	Heron Blue 56079 26GA	Navy Blue 56084 24GA	Slate Blue 56067 24, 26GA			

Signature Matte – SMP Coated metal

Ebony
9822
26GA

Expressence – Architectural Print Series

Dark Cedar
18-9875
24GA

Weathered Cedar
18-9874
24GA

Polyurethane Finishes

Silver Polyurethane
7500
24, 26GA

Barrier Finishes

Bone White
1508-8/1508-4
22GA

Natural Finishes

Galvalume Plus
AZ50 (AZM150)
22, 24, 26GA

Metallic Finishes

Carbon
9789
24GA

Light Pewter
11078
24GA

Bright Silver
11080
22, 24, 26GA

Copper
9919
24GA

Colour Availability

Please scan the QR code or click here to confirm colour availability by region.

Warranty

Weather XL
Expressence
Polyurethane Finishes
Metallic PVDF Finishes

SHERWIN-WILLIAMS. Coil Coatings

Testing and Approvals

Test / Approval Type	Test Standard	Result
FIRE: Non-Combustibility	ULC S135	Pass
FIRE: External Fire Exposure CL725 / CL725R	ULC S107	Class A, C
FIRE: External Fire Exposure CL725 / CL725R	UL 790	Class A, C

Engineering & Environmental Documents

CSSBI EPD
XCarb EPD
Load Tables

Principal Characteristics

•These profiles offer structural strength suitable for commercial, and industrial designs
• CL6025 profiles are designed for wall application
• CL725 is a roof profile that can also be used on walls and on contoured surfaces
• Available with perforated options for wall applications
• Available with perforated options for wall applications
• Easy and economical installation

CL6025, Royal Blue

CL6025(R)/CL725(R)

Data Sheet

Exposed Fastener | Roof & Wall

CL6025 35.43" | CL6025R 35.43" | CL725 35.43" | CL725R 35.43"

Matching Trim System for CL6025



Inside Corner
1101



Outside Corner
1104



Jamb
1111



Drip
1118



Conversion
1120



Partition
1121

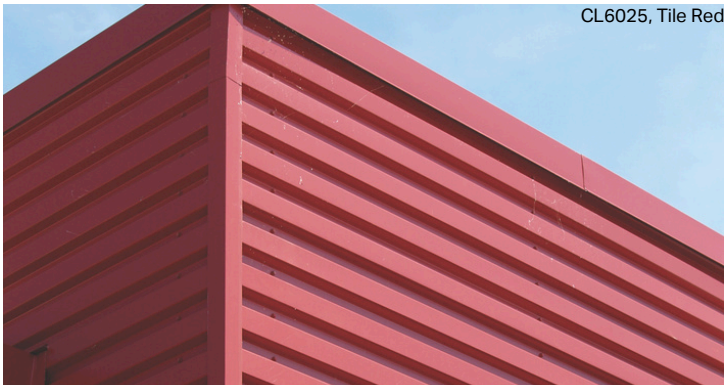

Matching Trim System for CL725(R) - Roof Application



Ridge/Cottage
Hip Cap FR-8



Top Moulding
C-120



End & Sidewall
Flashing C-141



End
FIR-8



Type B Valley - 24"



Eave



Gable S123

Vicwest Inc. reserves the right to amend product specifications without prior notice. Product specification, thicknesses and colours shown in this document should not be taken as being available in all regions, and reference should be made to Vicwest's colour chart, or advice should be sought from Vicwest's Customer Service Department. Recommendations for the uses described herein should be verified for suitability and compliance with actual requirements of any local building codes, applicable laws and regulations.
Colours shown in this document are representative only. Final colour selection should be made from actual colour samples which are available through our Sample Store.
To ensure you are viewing the most recent and accurate product information, please scan the QR code or click here.