# SOFFITV / SOFFITNV

Data Sheet

Double Panel Vented Soffit & Double Panel Non-Vented Soffit

## Double Panel Vented Soffit

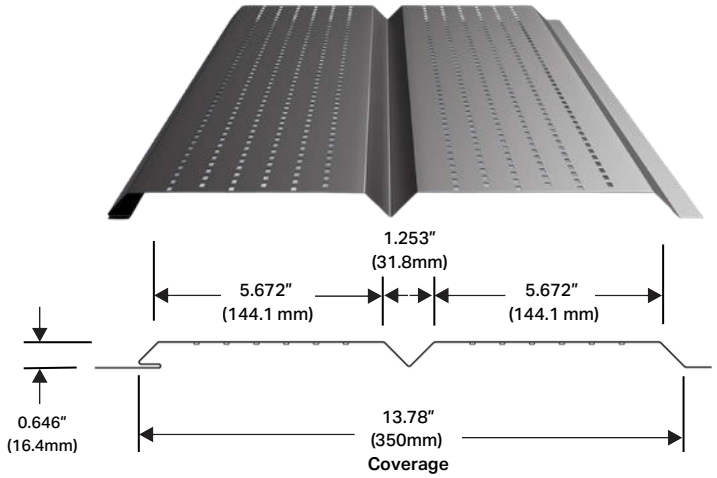


## Double Panel Non-Vented Soffit

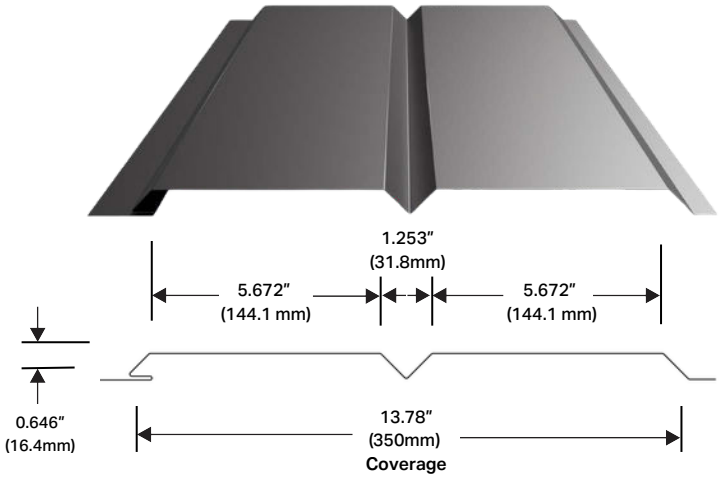


### Product Description

Soffit serves both functional and aesthetic purposes. There are two options to choose from:

- Double Panel Vented Soffit: For homes with vented attics that use soffit as part of their designated air-intake system, vented soffit is the ideal choice.
- Double Panel Non-Vented Soffit: For homes with covered porches, entryways, and decorative overhangs without soffit ventilation, non-vented soffit is the ideal choice.

Built from premium steel, Vicwest's Double Panel Vented Soffit and Double Panel Non-Vented Soffit profiles offer a long-lasting alternative to traditional aluminum soffit.

Available in a wide range of colours, these profiles compliment Vicwest's True Nature, Regency, and Prestige residential roofing systems which allows contractors, builders, and homeowners to source roofing, siding, and soffit from one supplier. A matching colour palette across Vicwest residential products creates a cohesive and polished finish across the building exterior.

### Product Features & Benefits

- Traditional residential style soffit profile offered in both vented and non-vented options
- 28-gauge steel reduces the risk of denting during installation compared to traditional aluminum
- Pairs well with Vicwest roofing profiles for a consistent colour match across the building envelope
- Soffit, roof, and siding offering from Vicwest ensures a cohesive looking finish
- Ideal choice for functional and aesthetic use

### Market

- Residential

### Dimensions

| | |
|---|---|
| Fastening System | Hidden Fastener |
| Application | Soffit |
| Covered Width | 13.78" (350mm) |
| Profile Depth | 0.646" nominal (16mm) |
| Steel Grade | 28 Gauge (33 grade)<br>26 Gauge (33 grade) |

| Available Gauges | Weight LB/FT2* |
|---|---|
| 28GA (standard) | 0.9039 lbs |
| 26GA (non-standard) | 1.2519 lbs |

*Weight-LB per square foot may differ per paint finish and profile covered width. Please contact your sales representative for further assistance.

### Production Lengths

| | |
|---|---|
| Victoriaville, QC | 4' - 12' max (1.22m - 3.66m) |

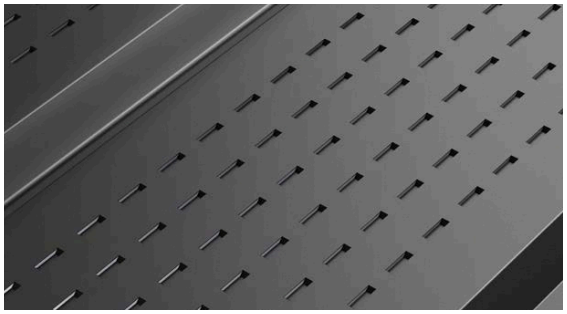

# SOFFITV / SOFFITNV

Data Sheet

## Double Panel Vented Soffit & Double Panel Non-Vented Soffit

**Signature –** SMP Coated metal

| | | | | | |
|---|---|---|---|---|---|
| Black<br>56068 | Deep Grey<br>55174 | Charcoal<br>56072 | Greyberry<br>55090 | Regent Grey<br>56082 | Stone Grey<br>56071 |
| Bone White<br>56069 | White White<br>56076 | Bright White<br>56086 | Dark Brown<br>56062 | Oak Brown<br>56158 | Cocoa Brown<br>56077 |
| Metro Brown<br>56154 | Tan<br>56074 | Pebble Khaki<br>55051 | Buckskin<br>55119 | Burgundy<br>57319 | Dark Red<br>56064 |
| Tile Red<br>56066 | Bright Red<br>56080 | Orange<br>55554 | Gold<br>56070 | Ivory<br>56090 | |
| Dark Green<br>56073 | Green<br>56078 | Heron Blue<br>56079 | Royale Blue<br>56081 | Slate Blue<br>56067 | |

**Signature Matte –** SMP Coated metal

| | | |
|---|---|---|
| Ebony<br>9822 | Graphite<br>9821 | Espresso<br>10276 |

**Natural Finishes**

| |
|---|
| Galvalume Plus<br>AZ50 (AZM150) |

### Colour Availability

Please scan the QR code or click here to confirm colour availability by region. Colour availability is grouped regionally to help optimize lead times, but is not restricted to orders within those regions.

Lead times may differ for non-standard colours. Please contact your sales representative for further assistance.

### Warranty

Weather XL
Expressence
Polyurethane Finishes
Metallic Finishes

*Warranty applies to Double Panel Non-vented Soffit only

# SOFFITV / SOFFITNV

Data Sheet

Double Panel Vented Soffit & Double Panel Non-Vented Soffit

**Hidden Fastening System**

**LAP DETAIL**

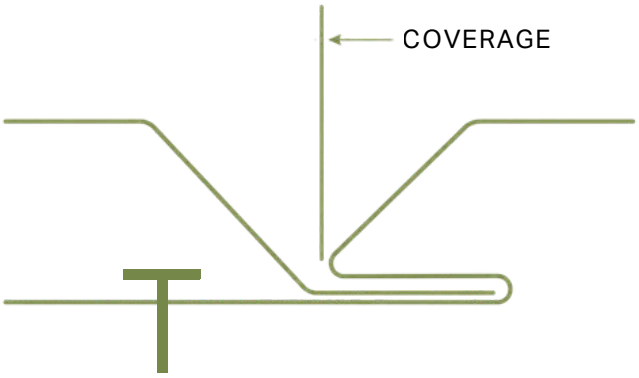


**HOLE PATTERN DETAIL**

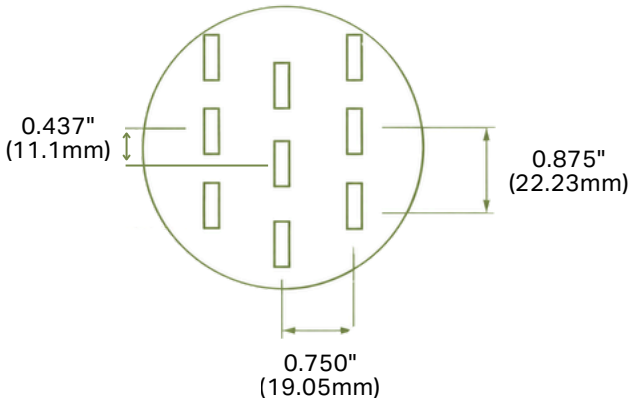


| Substrate | Screw & Type no. |
|---|---|
| Wood | #1/4-14 x 1.5" Long, Hex Head, Type AB, Self-Tapping |
| Steel | #1/4-14 x 1" Long, Hex Washer Head, Point #3, Self-Drilling |

**Testing Data**

| Test Type/Description | Test Standard | Result |
|---|---|---|
| Non-combustibility (Double Panel Non-vented soffit) | ULC S135 | Pass |

**Engineering & Environmental Documents**

CSSBI EPD
XCarb EPD

Vicwest steel products are manufactured with consideration for environmental sustainability and are recyclable. Vicwest utilizes Electric Arc Furnace (EAF) production methods for approximately 70% of its steel.

Customers are advised to consult their local Vicwest representative regarding the applicability of LEED certification and specifications of Vicwest's XCarb® steel offering.

Vicwest Inc. reserves the right to amend product specifications without prior notice. Product specification, thicknesses and colours shown in this document should not be taken as being available in all regions, and reference should be made to Vicwest's colour chart, or advice should be sought from Vicwest's Customer Service Department. Recommendations for the uses described herein should be verified for suitability and compliance with actual requirements of any local building codes, applicable laws and regulations.
Colours shown in this document are representative only. Final colour selection should be made from actual colour samples which are available through our Sample Store. To ensure you are viewing the most recent and accurate product information, please scan the QR code.

vicwest-soffitv-soffitnv-data-sheet-en-ca
MKG-DS-EN-V1